

BMS 13-65 Cable

BMS 13-65  
Aircraft Cable, Aerospace Cable


BMS 13-65 Aerospace Cable Construction:

Conductor: Silver Coated Copper  
Shield: Double Braid - Overall Silver-Coated Copper Flat and Round Braid Shield  
Insulation: Polytetrafluoroethylene (PTFE)  
Jacket: Fluorinated Ethylene Propylene (FEP)

BMS 13-65 Aerospace Cable Ratings:

Nom. Impedance: 50 ohm  
Temperature Range: -55° C to 200° C  
BMS 13-65 Aerospace Cable Application:

These lightweight Boeing spec cables are suitable for general use in various areas of aircrafts

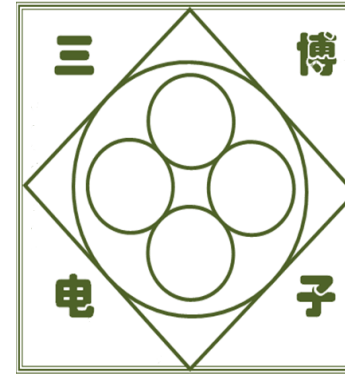

Part Number	Nom. Dia. of Cond.	Nom. O.D. (in)	Nom. Imp.
BMS13-65TOE	0.0244	0.111	50
BMS13-65TOF	0.0348	0.141	50
BMS13-65TOG	0.049	0.187	50
BMS13-65TOH	0.067	0.252	50
BMS13-65TOJ	0.0904	0.322	50
BMS13-65TOK	0.147	0.488	50